

MicroLite Specifications

	LITE5008L LITE5032L Internal Temp	LITE5032L-RH Internal Temp/RH	LITE5032L-4/20 4 to 20 mA	LITE5032L-V 0 to 10 V	LITE5032L-EXT External NTC
Range	-40 to 80 °C	Temp: -40 to 80 °C RH: 5 to 95 %	4 to 20 mA	0 to 10 V	-50 to 150 °C
Accuracy	0 to 60 °C: ±0.3 °C After calibration: -40 to 0 °C: ±0.3 °C 60 to 80 °C: ±0.3 °C	Temp: ±0.3 °C RH: ± 2%	±20 µA	±5 mV	± 0.3 °C (after calibration with Fourtec NTC sensor)
Resolution	0.03 °C or better	Temp: 0.01 °C RH: 0.05 %	1 µA (display) 5 µA (software)	1 mV (display) 4 mV (software)	0.02 °C or better
Maximum Load	N/A	N/A	25 mA, 3 V	12 V	N/A
Dew Point	X	✓	N/A	N/A	N/A
LCD	✓	✓	✓	✓	✓
LED Alarm Indicator	✓	✓	✓	✓	✓
Sampling Memory	8,000 and 32,000	32,000 (16K per channel)	32,000		
Sampling Rate	Once per second / once every 18 hours				
Battery Type / Battery Life	CR2032 3V 2 years, depending on sampling rate and operating conditions				
Operating Environment					
Dimensions (With Cap)	11 x 3.9 x 2.6 cm	11 x 3.9 x 3 cm	14 x 3.9 x 2.6 cm		
Weight	45.5 g				
Standards Compliance	CE, EN12830, IP67	CE, EN12830, IP54			
Wall Mount	Logger cradle accessory provided				

About Fourtec

Fourtec – Fourier Technologies is a recognized leader in data-logging and monitoring solutions for controlled industrial environments, such as food, pharmaceutical, medical, storage and transportation industries.

Our solutions enable our customers to deliver higher quality products, ensure consumer safety, comply with regulatory requirements and increase profitability. Innovation, expertise and a commitment to quality are the values that drive the development and production of our products.

Fourtec – Fourier Technologies is a proven specialist in cold chain management systems, we deliver end-to-end

solutions that accompany products from the processing floor to the end user.

Fourtec – Fourier Technologies operates in over 50 countries, through local distributors / partners. Fourtec’s trusted data acquisition solutions have been implemented globally by many leading organisations such as: Mylan, Pfizer, Teva, Schneider Electric, Vishay, airline catering companies and many others.

Fourtec – Fourier Technologies is a spinoff company based on the industrial division of Fourier Systems, a world leader with more than 30 years of experience in serving this market in the field of science education.



www.fourtec.com | info@fourtec.com

© 2020 Fourtec - Fourier Technologies Ltd. All rights reserved. Fourtec - Fourier Technologies Ltd. logos and all other Fourtec product or service names are registered trademark or trademarks of Fourtec - Fourier Technologies Ltd. All other registered trademarks or trademarks belong to their respective companies. P/N BK180, Rev 5.15



MicroLite
Portable cable free USB loggers

Combining innovation with simplicity, the high accuracy MicroLite USB data logger is a vital tool for monitoring and recording a variety of data. The MicroLite is available in 6 models, offering a unique plug and record data logger for every application and helping organizations maintain the highest standards throughout the cold chain. Real-time sensor readings with corresponding time stamp are clearly displayed on the logger's LCD screen, incorporating alarm thresholds. The logger is designed for low power consumption to extend battery life and reduce the time between battery replacements.

- High accuracy, high functionality, low cost data logger
- Direct USB interface for setup, data download and firmware updates
- Unique Boomerang™ feature that automatically creates and emails PDF data report when logger is connected to PC
- Complimentary DataSuite Software for comprehensive data analysis and logger calibration
- Rapid data download to Graph, Table view and Excel spreadsheet
- LCD featuring up to 3 decimal point readings, min/max data history and battery level
- LED alarm indicator
- Up to 2-year battery life in normal conditions
- 32,000 sample memory accommodating long-haul transports
- Magnet key to mark time stamps, activate and stop logging
- Built-in real-time clock and calendar
- Dust and water resistant, depending on logger model
- Cradle wall mounting for fixed monitoring



Solutions


AGRICULTURE & AQUACULTURE


COLD CHAIN


FOOD & FOOD PROCESSING



HOSPITAL ENVIRONMENTS


MUSEUMS


PHARMA INDUSTRY


WAREHOUSE STORAGE


TRANSPORTATION





MicroLite - compact, cost-effective data logging

The MicroLite product line measures temperature, humidity, voltage and current via internal + external inputs. Delivering ultimate application accessibility, the MicroLite is an ideal solution for a variety of industrial cold chain logistics, requiring a small form factor USB data logger.

The comprehensive MicroLite range allows organizations to select the unit most appropriate for their mission-critical environment:

Internal Temperature
LITE5008L/
LITE5032L

Internal Temperature & Humidity
LITE5032L-RH

External 4 to 20 mA input
LITE5032L-4/20

External 0 to 10 V input
LITE5032L-V

External NTC 10kΩ input (with NTC probe)
LITE5032L-EXT

Industrial screw-to-wire interface located inside logger cap allows direct data transfer from external sensors to the logger's memory

MicroLite

Portable cable free USB loggers

1

Record data using internal or external sensors

2

USB data download to PDF report with automatic email delivery

3

Data analysis using integrated DataSuite software



DataSuite Software for MicroLite


Supported Operating Systems:
Windows® XP SP3/ Vista/ 7/8.1/10 (32 and 64 Bit)

Minimum Hardware Requirements:
Pentium 4, 2 GHz Processor or better, 512 MB RAM, 250 MB available disk space

The license-free DataSuite software provides security for your products with online monitoring and control of the entire application environment.

Data View Features

Real-time data in multiple displays (Graph, Table, Statistics)

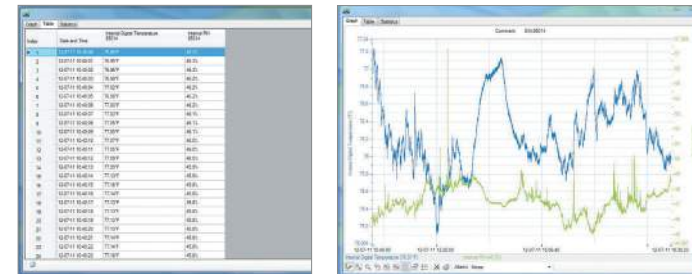


weboomerang™ Feature

Configure logger setup to automatically create and email a PDF data report when connected to a computer via USB


Alarm Features

Alarm level setup with email & SMS notifications. Two alarm levels, allowing for programming of separate parameters, including alarm delay and duration

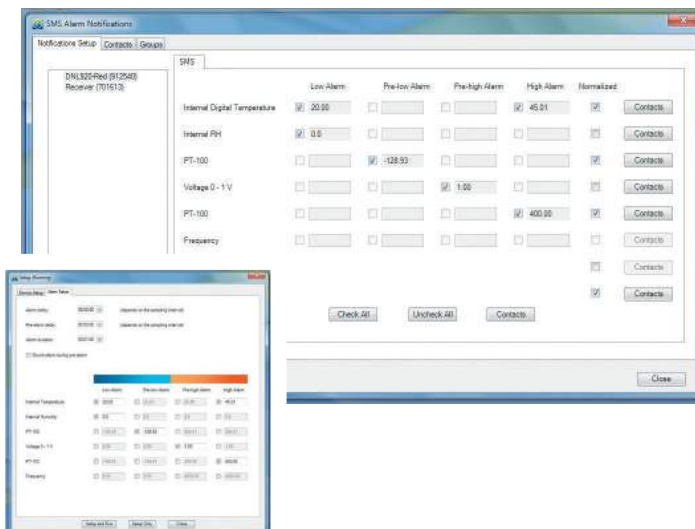


Report Module

The Report module provides the MicroLite user with an intuitive interface for creating and generating reports which have many parameters garnered from the MicroLite units and software. Each report can be emailed to a selected distribution list, at pre-defined time intervals, in PDF and Excel format

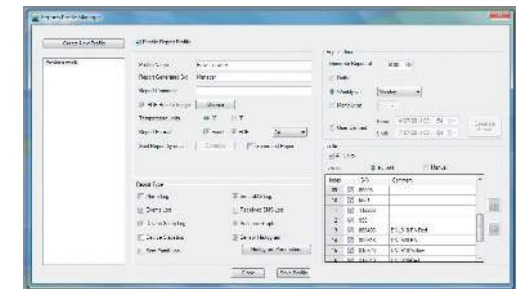


Analysis Features

Dew point analysis, FO Pasteurization, histogram, MKT, statistics with export to Excel and CSV formats

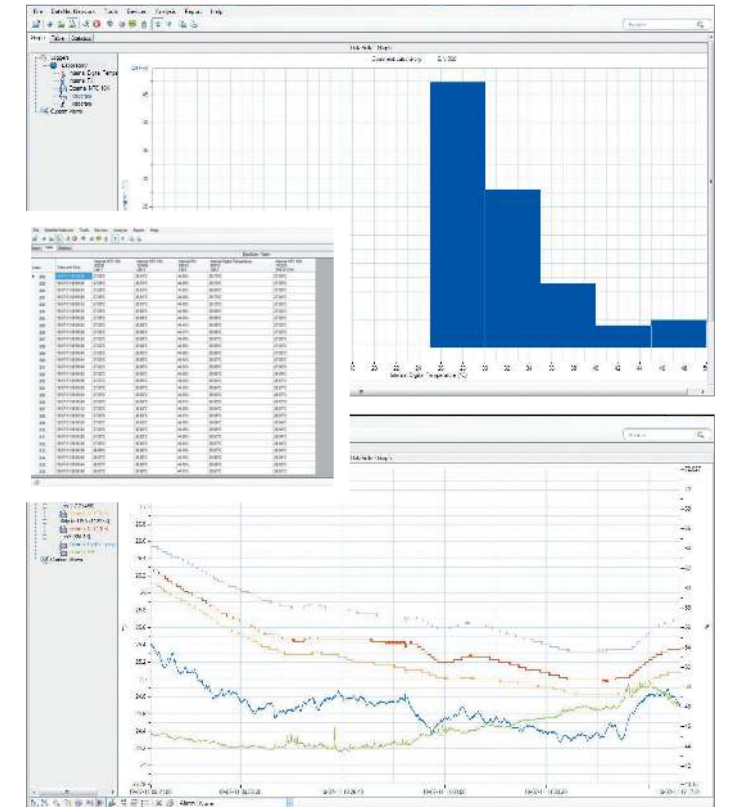

FDA Title 21 CFR Part 11 Compliant

DatPass: DatPass is a user administration software which supports the assignment of passwords and operating privileges for all Fourtec industry application software ensuring CFR compliancy. CFR is a Food and Drug Administration (FDA) issued regulation (Title 21 Code of Federal Regulations, Part 11).

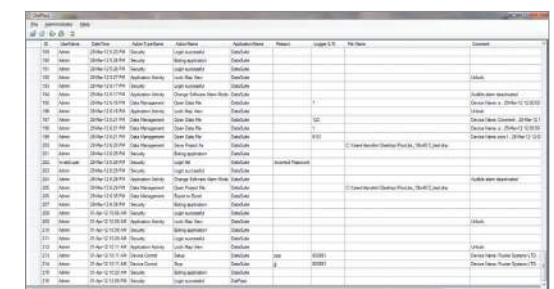

DatPass Audit Trail